OPPA WOODWORKING, JNC.



Ph. 310-548-4142 info@coppawoodworking.com www.coppawoodworking.com

Measuring Instructions - Arch Top Doors


Accurate measurements are very important when ordering your new wood screen or storm doors. It's always best to hire an experienced door installer to take measurements, inspect the door jamb and do the installation.

Be sure to measure the exact spot where the screen door will be attached to the door jamb or brick mold trim. There should be a "step" that the screen door fits into. This "step" should be at least 3/4" to 1-1/8" deep. This will determine what door thickness to order. Double check that the entry door handle does not stick out into this space. If there is not enough room, then the door jamb may need to be built out, or trim added to the exterior.

Measure the width at the top, middle and bottom. Measure the height on the left and right sides. If the measurements are different that means the door jamb is out of square. We recommend going with the width measurement closest to the arch (width 1) (minus the clearance) to ensure the shape of the arch is correct.

We build the doors to the size that you provide us. We do not automatically make any deductions for clearance. Typical clearance needed for single doors is 1/4" total from the width and 1/4" total from the height. This allows 1/8" on every edge. **Please make this deduction before giving us the measurements. It is very important that clearance is deducted on arch tops in order for the arch to fit properly.

Measurements should be in eighth inch increments please. We do not do 16th inch increments. These instructions are for True Half Circle Arches and Eyebrow Arches. Please see our website for examples of each shape. If you have a different shape please contact us.

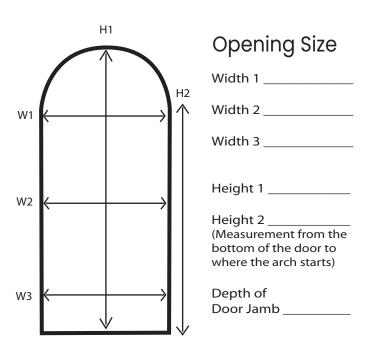

Door Size	True Arch or Eyeb	row
Width x Height:		
Thickness:		

